


## SYSTEM FEATURES FOR SAFRIG DAVIT ARM:

- 360° ROTATION CAPABILITY.
- INTEGRATED RESCUE CAPABILITY .
- RIGID ANCHOR POINT RATED FOR ONE USER.
- RETRACTABLE DEVICES AND SHOCK ABSORBERS USED WITH THIS PRODUCT MUST HAVE AN AVERAGE ARRESTING FORCE OF NOT GREATER THAN 900 lb (4 kN) AND MEET ANSI Z359.14 TYPE B OR Z359.13 RESPECTIVELY. REFER TO RETRACTABLE DEVICES OR SHOCK ABSORBERS LABELING TO DETERMINE MAXIMUM ALLOWED USER WEIGHT.
- UPRIGHT TUBE OUTFITTED WITH A FOLDABLE ROTATION HANDLE.
- DAVIT ARM ROTATION TO BE CONTROLLED USING A ROTATION LOCK AND LIMITING MECHANISM. ROTATION CAN BE LIMITED TO A SET RANGE OR ROTATION CAN BE LOCKED COMPLETELY.
- HIGH STRENGTH DURABLE STEEL CONSTRUCTION.
- ALL COMPONENTS ARE POWDER COATED SAFETY YELLOW.
- ALL HARDWARE IS GRADE 8 ZINC PLATED.
- 550 lb. (249 kg) APPROX. OFFSET ASSEMBLY WEIGHT.

## FEATURES FOR SAFRIG COUNTERWEIGHT BASE:

- 1,152 lb. (523 kg) APPROX. DRY WEIGHT.
- 5,000 lb. (2268 kg) APPROX. WEIGHT WHEN FILLED WITH CONCRETE.
- HIGH STRENGTH DURABLE STEEL CONSTRUCTION.
- DOES NOT REQUIRE ANY VEHICLE COUNTERWEIGHT.
- ALL HARDWARE IS GRADE 8 ZINC PLATED.
- ALL COMPONENTS ARE POWDER COATED SAFETY YELLOW.
- INTEGRATED FORK POCKETS FOR EASY SYSTEM POSITIONING

I-SAFE READY  
TOTAL SYSTEM WEIGHT: APPROX. 5,550 lb. (2517 kg)  
SYSTEM SAFETY FACTOR: 2:1  
MEETS OR EXCEEDS OSHA REQUIREMENTS

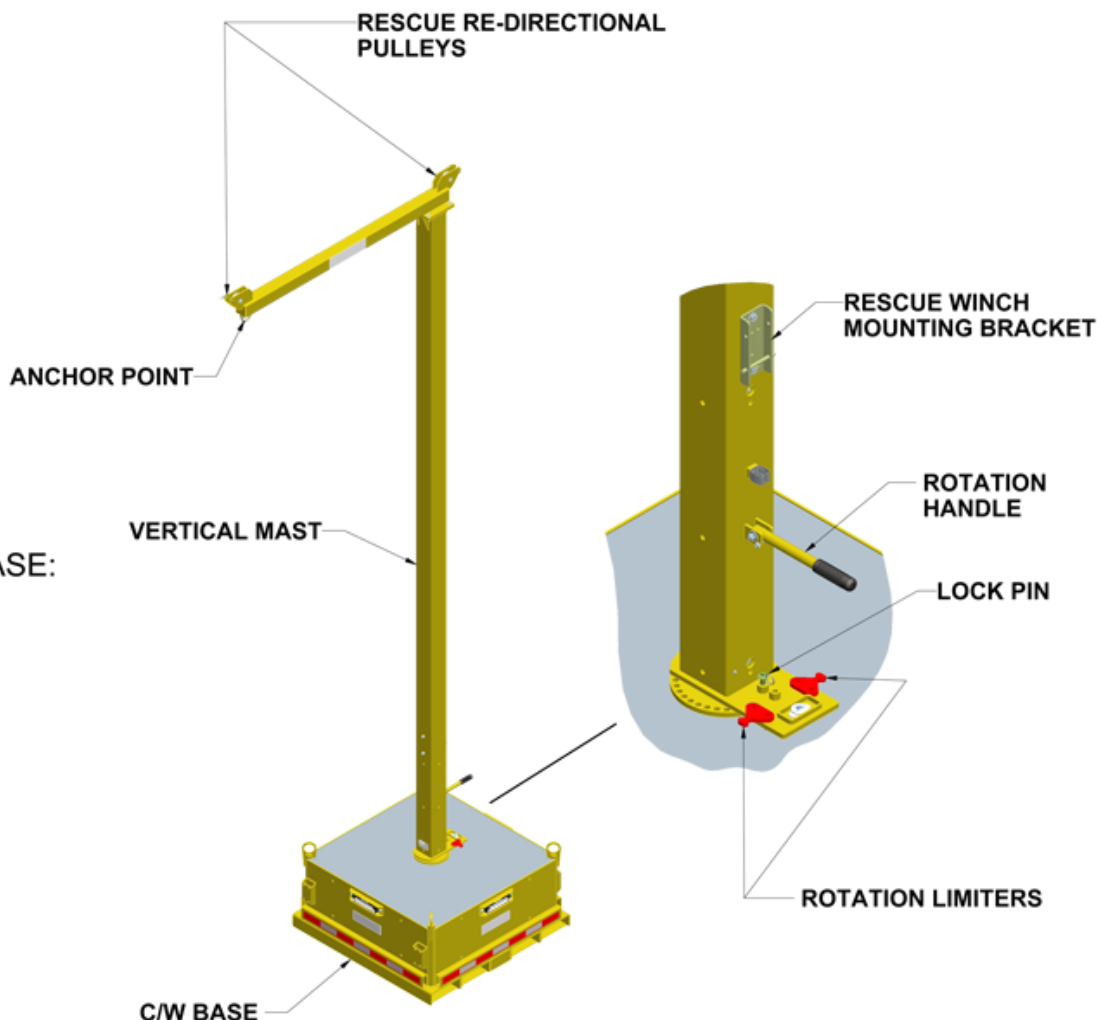

## CONCRETE INCLUDED

THIS DOCUMENT CONTAINS INFORMATION THAT MAY BE PRIVILEGED OR CONFIDENTIAL AND IS THE PROPERTY OF CAPITAL SAFETY.

IT IS INTENDED SOLELY FOR THE PARTIES TO WHOM IT IS ADDRESSED. SUCH PROPRIETARY INFORMATION MAY NOT BE USED, REPRODUCED, OR DISCLOSED TO ANY OTHER PARTIES FOR ANY OTHER PURPOSE WITHOUT THE EXPRESSED WRITTEN PERMISSION OF CAPITAL SAFETY.

IT IS THE END USER'S RESPONSIBILITY TO REVIEW, CONFIRM, AND APPROVE THE DESIGN DETAILS CONTAINED HEREIN. ANY DESIGN CHANGES AND/OR ADJUSTMENTS NEEDING TO BE MADE AFTER THE SIGNING OF THIS DOCUMENT MUST IMMEDIATELY BE COMMUNICATED TO CAPITAL SAFETY. HOWEVER, ONCE THE SIGNED APPROVAL IS RECEIVED AND FABRICATION HAS COMMENCED, NO DESIGN CHANGES OR ADJUSTMENTS OR RETURNS WILL BE ALLOWED. FINAL LEAD TIME WILL BE ESTABLISHED BASED ON THE RETURNED AND DATED APPROVAL DOCUMENT BACK TO CAPITAL SAFETY.

**GRAVISYS**  
**INC.** "FALL PROTECTION SOLUTIONS"

155 Athabasca Avenue, Sherwood Park, Alberta T8A 4C8  
Ph: (780) 417-1800 Fax: (780) 410-9925 [www.gravisys.com](http://www.gravisys.com)